



**we leave
a mark.**

semket®

Labelling systems

semket Etikettiersysteme GmbH
Tiroler Straße 9, 3105 St. Pölten-Radlberg
Tel: +43 (0) 2742 / 47 0 47 0
Fax: +43 (0) 2742 / 47 0 47 90
office@semket.com
www.semket.com

RE-PRO 2

The perfect labeller for bottles



simply wrap-around - flexible - variable

www.semket.com

RE-PRO 2 - The perfect labeller for bottles

Easy to use

No complex adjustments are necessary by automatic calibration of labels and products.

- ▶ Front side labelling
- ▶ Front and back side labelling in one production step - accurately in symmetry
- ▶ Additional symmetric application of another label



The half-automatic labelling machine for wrap-around-labelling of bottles and cylindrical objects.

High-precision, solid synchronous motors serve as drive. With special synthetic rolls, optimized crease-free labelling is a precondition.

The machine is easy to use. Through a simple adjustment the position of the labels on the bottles can be set. Everything else is done by an intelligent controller such as measuring of the labels for accurate labelling. The last adjustment is always saved automatically. Only at the alternation to another label format the labels need to be measured again by the machine.


Options

- ▶ **Front and back side labelling**
(also with different label formats) in one production step (from a label roll)
- ▶ **Additional labelling**
Additional symmetric application of another label on an already labelled bottle
- ▶ **Printer connection**
Label take-over directly from the printer for immediate labelling
- ▶ **Labelling for bottles with marks**
on inquiry
- ▶ **Rolls – with grinded profile**
- ▶ **Sensoring – for transparent labels**

Technical Data

Supply voltage	230 V, 50 Hz
For bottle diameter (mm)	30 - 100
standard (further on inquiry)	50 - 90
Media roll:	
Label dimensions	
width max. (mm)	200
width min. (mm)	30
length max. (mm)	400
length min. (mm)	30
Label rolls	
Outside diameter max. (mm)	200
Core diameter (mm)	76
Winding of labels on roll	Outside, right or left side ahead.

Printing and labelling in one production step

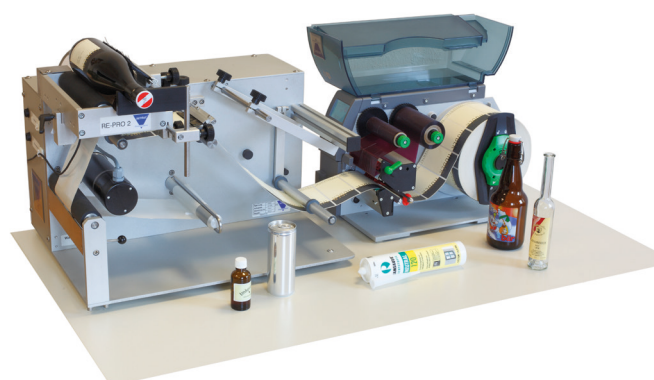

- ▶ Label printing - Front and backside labelling
- ▶ Labelling - front and backside
- ▶ Choose label layout directly from the printer (without PC)
- ▶ Save label layout on Flash Card (Compact-Flash Type 1)
- ▶ Automatic calculation - Date of expiry
Batch numbers for traceability